

# Sarex Overseas (A division of Sarex Organics Pvt. Ltd.)



Corporate Office: 501-502, Waterford, C Wing, Juhu Lane, Andheri (W), Mumbai - 400 058, India. Phone: +91(22) 6128 5566 / 4218 4218, Fax: +91(22) 4218 4350.

Web: www.sarex.com • Email: fchem@sarex.com

## APPOLO-1164 GL

### 1. STRUCTURE

ОН

### 2. PRODUCT NAME & DETAILS

2,4-Bis(2,4-dimethyl phenyl)-6-(2-hydroxy-4-methoxy phenyl)1,3,5-triazine (Appolo-1164 GL)

**Product Code** : 010072

CAS No. : 1820-28-6

**HS Code** : 2933.69.90

Molecular formula : C<sub>26</sub>H<sub>25</sub>N<sub>3</sub>O<sub>2</sub>

Molecular weight : 411.50

### 3. REGULATORY INFORMATION

Chemical name	Common names and synonyms	CAS number	EC number
2-(2-Hydroxy-4-methoxyphenyl)-4,6 -bis(2,4-dimethylphenyl)-1,3,5-triazine	2-(2-Hydroxy-4-methoxyphenyl)-4,6 -bis(2,4-dimethylphenyl)-1,3,5-triazine	1820-28-6	
European Inventory of Existing Commercial Chemical Substances (EINECS)		Not Listed	
EC Inventory		Not Listed	
United States Toxic Substances Control Act (TSCA) Inventory		Not Listed	
China Catalog of Hazardous chemicals 2015		Not Listed	
Chinese Chemical Inventory of Existing Chemical Substances (China IECSC)		Not Listed	
Korea Existing Chemicals List (KECL)		Not Listed	
Canadian Domestic Substance List (DSL)		Not Listed	
Canadian Non-Domestic Substance List (NDSL)		Not Listed	
Japanese Existing and New Chemical Substances Inventory (ENCS)		Not Listed	

### 4. SPECIFICATION

: Light yellow powder **Appearance** 

: NLT 99% Purity (HPLC)

: NMT 0.2% Volatiles

Melting point : 179 - 180°C

% Transmittance at 450 nm : NLT 92%

% Transmittance at 500 nm : NLT 95%

Ash content : NMT 0.2%

#### Disclaimer

Product covered by valid patents are not offered or supplied for commercial use. The Patent position should be verified by the customer. Product covered by valid patents are not offered or supplied for commercial use. The Patent position should be verified by the customer. Products will not be supplied to countries where they could be in conflict with existing patents. Products currently covered by valid US patents are offered for R&D use in accordance with 35 USC 271 (e) (I)

Above information is given in good faith and without warrenty.



# Sarex Overseas (A division of Sarex Organics Pvt. Ltd.)




**Corporate Office:** 501-502, Waterford, C Wing, Juhu Lane, Andheri (W), Mumbai - 400 058, India. **Phone:** +91(22) 6128 5566 / 4218 4218, **Fax:** +91(22) 4218 4350.

Web: www.sarex.com • Email: fchem@sarex.com

# APPOLO-1164 GL

### 5. TGA CURVE

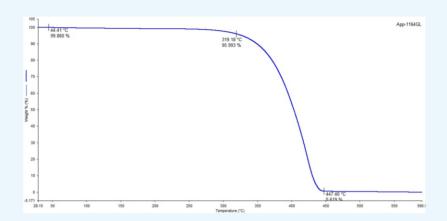


### 6. APPLICATION

: It is UV absorber polymer additives.

This product is suitable for Polyoxymethylene, Polyamide (PA), Polycarbonate (PC), Polyethylene Polyethylene terephthalate (PET); Polybutylene terephthalate(PBT); Polyether amine, ABS resin and polymethyl methacrylate (PMMA).

Especially suitable for nylon, engineering plastics and polymer fibers.

### 7. SPECTRAL TRANSMISSION

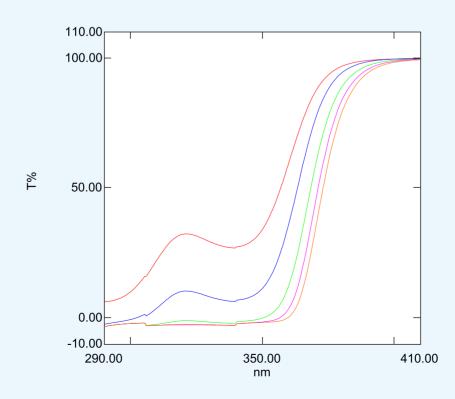

#### Disclaimer



## Sarex Overseas (A division of Sarex Organics Pvt. Ltd.)



Corporate Office: 501-502, Waterford, C Wing, Juhu Lane, Andheri (W), Mumbai - 400 058, India. Phone: +91(22) 6128 5566 / 4218 4218, Fax: +91(22) 4218 4350.

Web: www.sarex.com • Email: fchem@sarex.com

# APPOLO-1164 GL

### 7. SPECTRAL TRANSMISSION

APPOLO-1164 GL 0.001% (Toluene cell thickness=1 cm) - RawData APPOLO-1164 GL 0.002% (Toluene cell thickness=1 cm) - RawData APPOLO-1164 GL 0.004% (Toluene cell thickness=1 cm) - RawData APPOLO-1164 GL 0.006% (Toluene cell thickness=1 cm) - RawData APPOLO-1164 GL 0.008% (Toluene cell thickness=1 cm) - RawData

8. HAZARD CLASSIFICATION : Non-Hazardous Material.



9. ANNUAL CAPACITY : 50 MT

: Store in closed container in dry area away from direct sun light. 10. STORAGE CONDITION

11. PACKING DETAILS : Corrugated Boxes (7 Ply)

> Size = 360 X 360 X 480 mm Net Quantity per box = 20 kgs

Inner Packing double plastic liner inside

27 boxes can be placed on wooden pallet (ISPM 15) in 3 tier

(9 Boxes in one tier \* 3 tier = 27 Boxes) Total quantity per pallet = 27\*20 = 540 kgs

One 20 feet container load quantity = 540\*10 pallets = 5400 kgs

250 kg packing in FIBC, conductive big bag

12. SHELF LIFE : 3 years.